



For Earth, For Life
Kubota

DMC

KUBOTA DISC MOWERS

**DMC6000/DMC7000/
DMC8000/DMC8500**

Mounted and trailed disc mower conditioners with working widths
from 2.4 to 8.75m





All Kubota mowers are built for performance in even the toughest conditions. With a wealth of models, any requirement is covered, to make sure you will be able to make the most of the time available.



FULL LINE OF MOWER



WHY KUBOTA MOWER CONDITIONERS?

The Kubota range of mower conditioners has been designed to offer you a little bit more for your money than other mowers - in fact our ambition has been to raise the standard for mower conditioners - offering extra performance and features to make your working day a bit easier.



DMC6087N – triple mower combination with nylon tine conditioning and 8.75m working width.



DMC6000N series – rear mounted mower conditioners with nylon tine or roller conditioning and 2.4, 2.8 and 3.2m working width.



DMC6300 series – rear mounted mower conditioners with unique suspension concept, steel tine conditioning and working widths of 3.2-3.5m.

CONDITIONERS



DMC7000T/R series – front mounted mower conditioners with steel tine or roller conditioning and 2.8-3.5m working width.



DMC8000T/R series – left hand trailed mower conditioners with steel tine or roller conditioning and 2.8-3.5m working width.



DMC8500T series – centre pivot trailed mower conditioner with steel tine or roller conditioning and 3.2-3.5m working width.

CUTTING PERFORMANCE



'Express' Quick Change of Knives

All disc mowers in the Kubota range can be fitted with the 'Express' system for quick and easy changing of knives. Simply place the lever around the bolt, release the spring by turning the lever, and the knife is ready to be replaced by a new one.



E IN NEW DIMENSIONS

COUNTER-ROTATING THREE BLADED DISCS

Low Noise Cutterbar


The Kubota cutterbar is designed for low maintenance and quiet operation. Operators will appreciate the low noise of the new cutterbar during a long and busy working day. The long curved gear wheels run smoothly in oil and provide lots of transfer of power with little slack.

Heavy Duty Cutterbar


The Kubota cutterbar's high oil capacity ensures a very low working temperature for efficient oil cooling and lubrication of the entire cutterbar. The fully welded cutterbar with overlapping C-channels makes for a very stiff and strong design, ensuring very high level of durability.

Three Bladed Discs for More Cuts

With three blades per disc Kubota mowers are constantly cutting. This means a third less load per blade; an even load on the drive; smoother power usage; and produces a neat, cleanly cut stubble. Each steel blade is precisely angled to immediately convey the cut crop upwards with a combination of mechanical action and air flow.

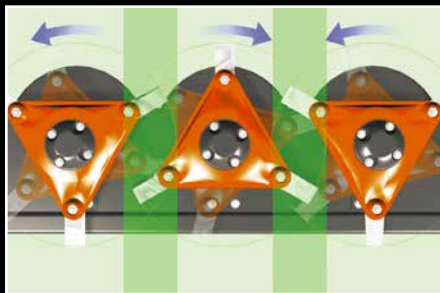


Kubota's counter-rotating three bladed discs provide a wider overlap on each disc...

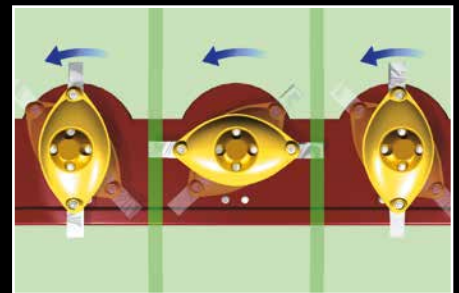

... compared to solutions with uneven number of discs.

Counter-Rotating Cutting Discs for Improved Overlap

All Kubota mowers have an even number of counter-rotating discs. Apart from the immediate crop transport to the rear this system ensures that even in wet conditions no stripes of uncut forage are left in the field.

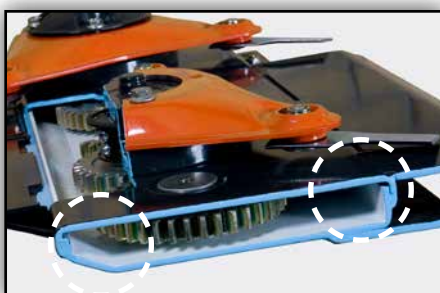

Fully welded cutterbar with overlapping C-channels for a very strong and stiff construction.




Specially tooled gear wheels with round design and long teeth result in low noise levels and efficient power transmission.


EFFECTIVE CONDITIONING

What Makes SemiSwing Stand Out

Utilizing the centrifugal force is what makes the Kubota SemiSwing conditioner stand out to other conditioner systems. It offers aggressive conditioning effect with excellent protection of the tines and virtually no wear.

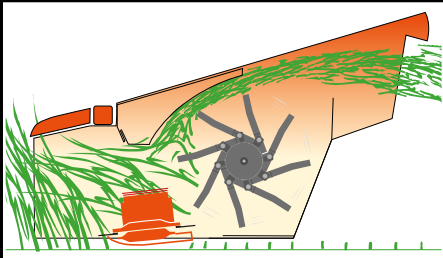

During operation tines will stay in a fixed position, providing full conditioning with minimum wear.

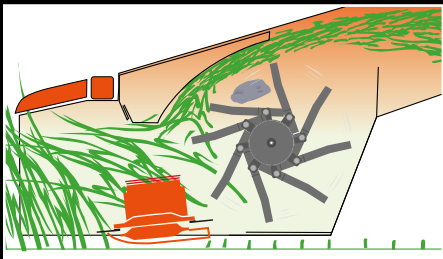

It requires a weight of 22kg on the tine to pivot the SemiSwing tine backwards.

To customize conditioning effect to changing conditions the conditioner plate can be set in 3 different positions.

Efficient crop transfer. Crop is efficiently lifted away from the cutterbar and moved along the conditioner plate for effective conditioning effect.

Excellent tine protection. Large obstacles are able to pass through, as the tines can pivot backward.



Wide and full width conditioner rotor for efficient crop throughput, full conditioning effect and reduced fuel consumption.

Aggressive Conditioning – Minimum Blockages

SemiSwing gives you aggressive and full conditioner effect. When the rotor starts the SemiSwing tines will instantly move into their working position and stay in a fixed position.

The angle and position of the SemiSwing tines ensures best possible crop transport. The crop is moved away from the conditioner rotor towards the conditioner plate. The result is reduced risk of blockages and optimum use of the conditioner plate.

Excellent Tine Protection – No Maintenance

When hitting an obstacle, the SemiSwing steel tines are able to pivot backwards and let obstacles pass through. This allows large obstacles (up to 103mm) to pass without breaking the tines. No broken tines will end up in the following pick-up and no repair is required on the conditioner rotor.

NYLON TINE CONDITIONING

Aggressive conditioner effect with steel tines – tines will stay in a fixed position for full conditioner effect.

Reduced wear – no constant movement of conditioner tines – virtually no wear on brackets or tines.

Once in working position the tine is locked by the rotor in its forward movement and will stay in full working position.



Further adding to the Kubota conditioner systems is the choice of nylon tine conditioning. The nylon tines are very rigid, yet durable, and will flex without breaking, if meeting an obstacle. This is an ideal solution when working in hilly conditions or with smaller tractors, as the weight of the nylon tines are less than with traditional steel tines.

It requires a weight of 22kg on the tine to pivot the SemiSwing tine backwards.


This means the tine will stay in a fixed position during conditioning. The benefit is no movement during rotation, meaning virtually no wear and tear on the brackets and full conditioning effect.

Roller Conditioning – Gentle Conditioning of Fragile Crop

The roller specification machines are equipped with two chevron profiled conditioning rollers. The rollers are the same width as the cutterbar and counter rotate, quickly transferring the cut crop from the cutting discs in between the rollers. The rollers provide gentle, yet effective conditioning of fragile crops such as lucerne/alfalfa, keeping leaf loss

to an absolute minimum. Conditioning intensity is varied by adjusting the minimum gap and the spring pressure exerted between the upper and lower rollers.

The special roller configuration with the top roller located further forward than the bottom roller provides a better flow of material.

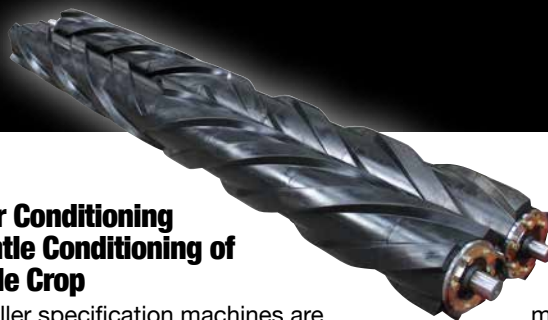

PROTECTING GROUND

KUBOTA DMC8000-DMC8500



Kubota Suspension for Clean Cutting Action

The DMC8000 and DMC8500 series are engineered with the unique Kubota suspension concept. The complete mowing section including the conditioner is suspended independently from the main chassis by either two or four long adjustable suspension springs, allowing field tracks and contours to be closely followed.

If an obstacle is encountered in the field, the mowing section will lift up and backwards, protecting the cutterbar from damage. When the obstacle is passed, the mowing section automatically returns to the working position.

A simple crank adjusts the whole cutterbar assembly up or down to a desired stubble height. Additional skids are available to increase cutting height.



Easy adjustment of stubble height.

AND MACHINE



Accurate Sideways Adaptation

The long spring design allows for excellent ground following ability. In uneven fields, the mower is able to adapt +500mm/-150mm.

Even Ground Pressure

The suspension springs are fitted on the widest possible position of the mowing section to ensure even ground pressure. Weight on ground is stable and only approx. 50–60kg on each side.

Effective Protection Against foreign Obstacles


The suspension rod is fitted between mowing section and mainframe. This ensures that distance between suspension rod and pushing arm is constant. When an obstacle in the field is encountered, the mowing section will move backwards and automatically raise to allow the object to pass. The mower will automatically return to working position once the obstacle is navigated.



The suspension springs ensure excellent sideways adaptation of the complete mowing section.



When an obstacle is encountered, the mowing section is forced backwards and the special suspension rod ensures that the mowing section is automatically lifted upwards and above the object.

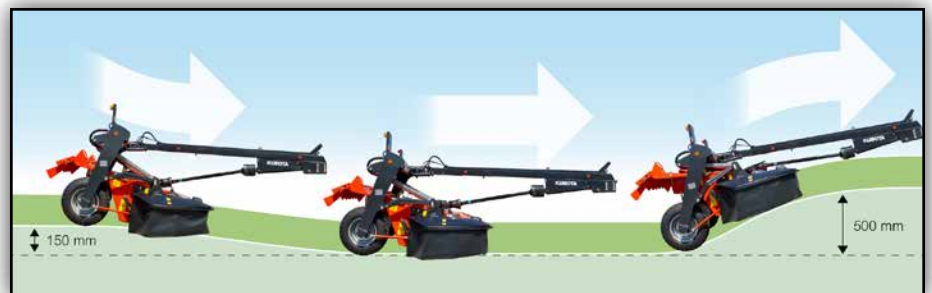

The suspension springs allow the mower to closely follow ground contours in uneven conditions. The cutting section can adapt 500mm up and 150mm down.

TRAILED MOWER CON

KUBOTA DMC8000-DMC8500



Tailored To Any Request

Including features such as SemiSwing conditioner, low maintenance cutterbar, independent active suspension, swath belt and FlipOver widespreading, DMC8000 and DMC8500 series machines are ready to meet every request with exceptional performance.

Tough and Reliable In Every Situation

Being prepared when mowing needs to take place is essential. Our machines are designed to offer maximum productivity and in addition we have a global support network standing by, dedicated to helping you do more, so you can make the most of the time available.



The swivel hitch headstock with reversible gearbox provides optimal manoeuvring ability.

DITIONERS



CENTRE PIVOT DRAWBAR

The DMC8500 models are supplied with a centre pivot drawbar for mowing both to the right and left sides of the tractor. This important advantage in mower design allows mowing a field in one continuous process, without the need for constantly opening up new 'lands'.

Consequently time consuming short runs are eliminated and mowing capacity is increased.

As is the output of the following machinery, as you can prevent creation of triangular or add shaped plots.

Turning on headlands is much easier, because the hydraulically operated drawbar allows the turning circle to be significantly reduced, saving time and reducing the number of instances where cut crop is driven over.



A lifting height of 50cm, ensures excellent ground clearance for transport and during headland turning.



The mower can be operated on either side of the tractor....



....which saves valuable time.

PREPARED-WHATEVE

KUBOTA DMC8000-DMC8500



The Swath Belt For Improved Performance

The Kubota DMC8000 and DMC8500 series can be fitted with a versatile swath belt to place two swathes into one. In this way the large swathes for large foragers or balers can be prepared, to speed up the collection of the crop. The swath belt can be raised and lowered from the tractor seat during operation. This allows you to adapt to each individual situation and

requirement, without wasting valuable time.

Adjustable Belt Speed

The belt speed is infinitely adjustable from the cab. In this way, the swathes can be placed either side by side, or on the top of each other, ensuring a perfect match to the pick-up width of the following machine.



When placing the first swath, the belt is raised and hydraulically lowered for the second swath.

R THE WEATHER



Setting DMC8000 and DMC8500 mowers for wide spreading is very simple.



Changing from swathing to wide spreading is a one-man job. Simply turn the rear plate 180°.



Dismount the two deflector doors and you are ready to mow.

Easy-To-Use Wide Spreading Kit

The Kubota DMC8000 and DMC8500 series can be fitted with an easy-to-use wide spreading kit. This enables the crop to be cut and spread in one operation, saving both time and at least one tedder operation.

Hydraulic Spreading Plate

The spreading vanes are positioned as far to the rear of the machine as possible when in use. The increased distance from the conditioning rotor to the spreading vanes provides more even spreading of the material across the entire working width, which in turn ensures better wilting.



The crop is directed inwards, away from the unmown crop.

THE COMBINATION M




KUBOTA DMC7028T-DMC7032T- DMC7032R-DMC7036T

Ideal for a Combination

Kubota DMC7000T/R series machines can be used in combination with a variety of mower conditioners, including the DMC8000 or DMC8500 series, DMC6000N, DMC6300T or on its' own, making these extremely versatile machines. With a working width of 2.8, 3.2 or 3.5m, the capacity of these machines is substantial.

NonStop BreakAway

To ensure maximum protection of the cutterbar, the Kubota NonStop BreakAway solution is implemented. During normal operation, the cutterbar is angled downwards, but if the BreakAway is activated, the cutterbar angle changes to a horizontal position, due to the geometry of the machine. This prevents the machine from damaging the ground surface.

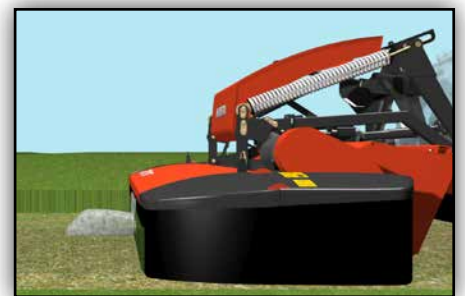

The suspension design protects the cutterbar against foreign obstacles.

OWER



Machines For Professionals

Kubota DMC7000T/R series is characterized by an excellent design of the suspension and accurate ground following. In addition the Kubota cutterbar, with outstanding cutting performance and a choice of either SemiSwing steel tine or chevron roller conditioning is fitted onto these machines.

The SemiSwing concept is based on high quality steel tines with low wear and high resistance, and has proven to have significantly reduced maintenance costs. Furthermore these machines are fitted with a variable conditioner rotor speed, to adapt to varying crop conditions - All features making this machine a very professional solution.



Kubota DMC7032T with 3.2m working width and a weight of only 1230kg.

EXCEPTIONAL ADAPT

KUBOTA DMC7028T-DMC7032T-DMC7032R-DMC7036T

KUBOTA. Ground Following System



Mower reacts instantly to uneven ground contours and can move 250mm down and 450mm up.

Superior Suspension Protecting Ground and Machine

The suspension design has been designed to offer outstanding flotation and even ground pressure. The two large suspension springs have been moved further outwards to provide excellent side stability, which is reflected in optimum protection of the stubble and far less skid wear.

The moving pattern of the machines is extremely flexible, allowing downwards movements of 250mm and upwards of 450mm.

In addition an innovative suspension design allows a transverse adaptation of 24°. This ensures excellent adaptation to uneven ground contours and higher reachable speed.



Heavy duty suspension springs for excellent ground adaptation.

ATION ABILITY



250 mm



Vertical adaptation of 24° to adjust to uneven fields.



Compact design for excellent view during operation and transport.

Easy Operation

Substantial efforts have been made to make daily operation as easy as possible. The clever design of the suspension creates an undisturbed view of the entire mowing area and excellent overview during transport. A clearance of 350mm is achieved during transport and headland turns.



DMC6300 SERIES – R

KUBOTA DMC6332T-DMC6332R-DMC6336T-DMC6336T VARIO

How You Will Benefit from QuattroLink

Inspired by the racing world, Kubota has created a new series of mower conditioners with a ground breaking suspension concept – the QuattroLink. The new DMC6300 series has been designed for even more productivity and to handle tougher conditions than ever. With its accurate tracking ability and highly flexible working range this suspension is providing unrivalled cutting performance.

Like a race car you want better tracking, ability to go at faster speed and adjust instantly to changing field conditions when operating your mower conditioner. These are the main benefits you will experience when running the DMC6300 series. The four suspension arms provide the mowing unit with an exceptional flexibility in adapting instantly to demanding ground contours inviting for higher speed and more productivity.



New Innovative Suspension Concept for Accurate Tracking

What makes the QuattroLink suspension unique? The mowing unit is pulled by four suspension arms fitted onto a fixed carrying arm that allows the mowing unit to float independently over the field, adjusting highly accurately and instantly to any changes in ground contours.

No Compromises on Flexibility

The mowing pattern is extremely flexible with a vertical working range of 700mm up and down and a transverse working range of 30°. The four arm suspension concept ensures constant ground pressure during working operations.

Full Width BreakAway Protection

Our NonStop BreakAway system just got even better. With the new QuattroLink suspension this system now offers protection across the full working width of the mower, including the part closest to the tractor. There are no limiting factors on the inside part of the mower, giving the driver true peace of mind. When hitting an obstacle in the field, the mowing unit will instantly move backwards and up, and then return to the original position.

AGING MOWERS



Ground pressure is easily set from the tractor seat, hydraulic with an easy to read pressure scale on the mower for clear guidance.



Exceptional ground following system. The four suspension arms provide an adaptation range of 400mm upwards and 300mm downwards for accurate tracking.



Excellent adjustment to uneven field conditions with a transverse working range of 30°.



BreakAway Protection – When encountering an obstacle in the field the mowing unit will swing backwards and over the obstacle, even on the inside of the mower, and then return it to the original working position. No need to stop – no time lost.

MOWING MADE EASY

KUBOTA DMC6332T-DMC6332R-DMC6336T-DMC6336T VARIO



Efficient Headland Management

The DMC6300 series provides generous clearance across the complete cutterbar, including the inside area. When lifting the mower on headlands, the mowing unit is raised and the carrying arm is tilted to a 10° angle. This provides the DMC6300 series with a level ground clearance of minimum 500mm across the full working width.

When lowering the mowing unit the carrying arm is lowered evenly without one side touching the ground before the rest of the mower, avoiding unnecessary stress and wear on the mower.





Minimum 500mm ground clearance across the complete mowing unit during headland turns. Mowing unit is raised and carrying arm tilted to a 10° angle.



Swath Plates Automatically Expand

Swath plates automatically expand when being slid inwards to support efficient and accurate swathing.

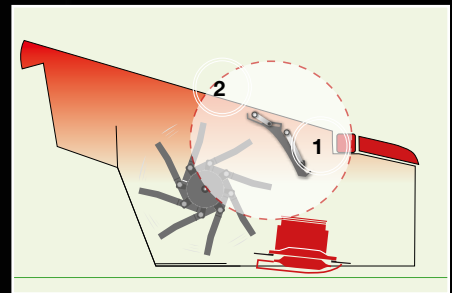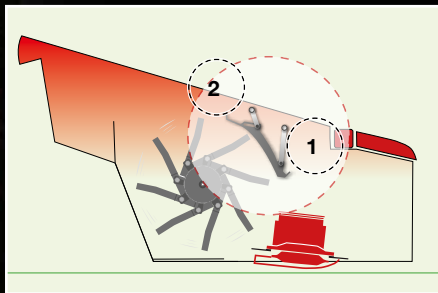

Dual Adjustment of Conditioner

The conditioner plate can be adjusted at both front (1) and rear (2) ends to customize the conditioner to crop intensity.



Changing from swathing to widespreading is virtually a one minute job. The swath plates are easily slid to the side. No tools are required.



Front and rear end of the conditioner plate is adjusted independently.

Even More Efficient Conditioning

The front end is adjusted separately to suit the crop intensity, even for massive crop, to avoid any blockages. Rear end is adjusted to ensure smooth and efficient crop flow into swaths or widespreading.

SMART ENGINEERING

KUBOTA DMC6332T-DMC6332R-DMC6336T-DMC6336T VARIO



Responding to Ever Changing Conditions

DMC6300 series comes with a host of smart features that allow you to get the job done faster, smoother and more efficient. When there's work to be done, you need a mower conditioner that is easily customized to the exact conditions facing you today.

Setting the conditioning intensity to crop density and conditions, changing

between swathing and widespreading and checking discs and knives is done easily and quickly, taking the hassle out of the daily work optimization.

Ground Pressure Remains Constant

During mowing operation the carrying arm always remains even to the ground, giving the mowing unit the freedom to instantly compensate and float across uneven ground contours.

The true benefit of the suspension concept is that even though overlap is changed, the chosen ground pressure remains the same. No need to stop and adjust, reset and control the ground pressure before you can go on. Just set the mower to the requested overlap and mow on.



Parking, Safe and Sure-Footed

With the integrated parking device, storage of the DMC6300 series is made easy and convenient, requiring a minimum of space during winter storage. The mower is firmly parked on strong and stable parking foot, bringing total height below 4.00m. When parked, being in working position or during vertical storage the lift arms are always in a horizontal position, making it very easy to mount or unmount the mower from the tractor.



FlexProtect side covers, rugged and sturdy, yet flexible when bumping into obstacles



Easy and quick access to the cutterbar for daily inspection of discs and blades.



Simple mounted and adjusting – easy levelling of suspension arm to counter any sideways tilt of tractor.

UNIQUE SOLUTIONS

KUBOTA DMC6336T VARIO



Hydraulic Adjustment of Overlap

DMC6336T Vario is fitted with hydraulic SideShift integrated into the carrying arm allowing each mowing units to move 400mm. To easily compensate for changing field conditions, the adjustable overlap is designed as a telescopic arm, directly into the suspension.

Adjusting the overlap is quickly done hydraulically from the tractor cab, and the chosen overlap is easily registered from the scale on the suspension arm.

Increase overlap when mowing odd sized fields, going around corners or operating on slopes to ensure no stripes are left behind. Reduced overlap on flat and even fields to improve performance and cutting width as much as 10%.

TRANSPORT



DMC6336T Vario - ComfortControl

The optional ComfortControl joystick of DMC6336T Vario provides the extra comfort of electro hydraulic folding for transport. Easy and simple.



Below 3.70m Transport Height

The mower fold hydraulically for transport and the telescoping frame arm moves to lowest overlap position, to reach a transport height of only 3.70m. And there is no need to leave the tractor before heading off, the outer side protection guard hydraulically folds into transport position.

Even Weight Balance for High Speed Transport

The complete weight of the DMC6300 series is spread evenly on both rear tires, with a 50/50% weight balance. This means the tractor is not sliding to one side during transport, providing extremely stable running characteristics of tractor and mower during the transport, inviting for higher speed.

SIMPLE SUSPENSION

KUBOTA DMC6024N-DMC6028N- DMC6028R-DMC6032N-DMC6087N

Protection of the Cutterbar

Kubota DMC6000 series machines are all fitted with the Kubota NonStop BreakAway system to protect the cutterbar. The integrated NonStop BreakAway autoreset system will protect the cutterbar from foreign obstacles.

If an obstacle is hit in the field the mowing unit will swing backwards and up. This gives maximum protection of the cutterbar.

Effortless Protection

There is no need to stop - or even to reverse the tractor to get the mowing unit into working position again. When engaged the spring loaded design ensures that the Kubota NonStop BreakAway system automatically returns the cutting unit to its original working position.

Accurate and Simple Suspension

The DMC6000 series is fitted with a highly efficient suspension system that includes centre suspended mowing units, efficient spring suspension and NonStop BreakAway. The mowing units are centre suspended via a suspension spring, to give an even weight distribution across the complete mower width. The benefit is less skid wear, optimum protection of the stubble and less fuel consumption.

Excellent Ground Adaptation

28 Faster and more precise adaptation

to ground contours is also achieved because of the centre suspended design. The suspension can also be provided with hydraulic setting of ground pressure, easy to adjust, even on the go.

Two Mounting Options


DMC6000 series can be adjusted for optimal operation according to different circumstances, such as field contours or working width of the front mounted mower. To ensure optimal overlap between front and rear units, the mowing units can be mounted in two positions on the suspension arm.



Two mounting options.

CONCEPT

SETTING ON-THE-GO

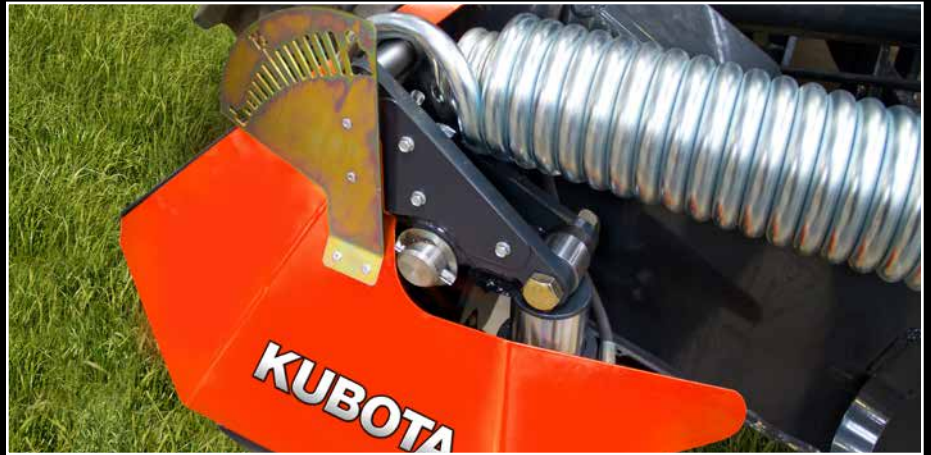

This feature provides easy and simple setting of ground pressure on the Kubota DMC6000 series. For greater operator comfort ground pressure of the large suspension spring is set hydraulically from the tractor cab. Easy to adjust, even on the go.

It is in fact a very simple and clever solution to an important challenge in optimizing the mowing job. On the hydraulic version the tension on the large suspension spring, which controls

the ground pressure, is adjusted hydraulically, to increase or lower pressure. The chosen ground pressure level is conveniently registered from the easy-to-read scale.

Accurate setting of ground pressure adds to significantly better working result and reduction of fuel consumption, as a mower with correct ground pressure is easier to pull, requiring less power and fuel.



Ample clearance during headland turns.



Centre suspension for even weight distribution across the entire working width.



Large compensating spring ensures excellent flotation across the full mower width.

CLEVER CHARACTER

KUBOTA DMC6024N-DMC6028N- DMC6028R-DMC6032N



Effective 600/900 nylon tine conditioning.

Compact in Size – Massive in Features

Kubota offers 4 centre mounted mower conditioners, DMC6024N, DMC6028N, DMC6028R and DMC6032N, in working widths of 2.40, 2.80 and 3.20m. They are fitted with the Kubota cutterbar with slim design for improved cutting performance. They all offer two conditioner rotor speeds, 600 and 900rpm, which can be easily changed by simply switching pulleys, to adapt to different conditioning requirements. At low conditioner speed, fuel consumption is minimized.

Light Weight Machines with Aggressive Conditioning

Due to the nylon tines fitted to the conditioner, the total weight of the machines is kept to a minimum, while keeping an aggressive conditioning. The fixed conditioning fingers are made from high quality nylon, to make them very rigid. This means excellent protection from stones and other obstacles. A perfect solution for farmer and smaller contractor machines! The DMC6028R offers gentle, yet effective roller conditioning of fragile crop.

Turnable Gearbox Speed

The machines also offer a large degree of operating adaptability, as they are factory fitted with the option of being operated with either 540 or 1000rpm. It requires no additional accessory. All that is needed is to turn the main gearbox on the suspension 180°. Widespreading equipment is also fitted as standard on the machines.

ISTICS



CLEVER TRANSPORT SOLUTION

The low gravity point during transport, with the weight of the mower close to the tractor, provides an excellent weight distribution, even during high speed road transport, and the machine is fixed by the hydraulic lifting arm.

In addition transport height is limited, so passing through narrow gateways or under bridges is not a problem. Another benefit is that the hydraulic cylinder also supports quick lifting of the mower from working to headland position.



Easy changeover from swathing to wide spreading.



Two speed gearbox – switched by turning the main gearbox 180°.



Lift on headland with ample clearance to existing swaths.

GIVE EFFICIENCY A B

KUBOTA DMC6087N



Easy to Operate for More Uptime

DMC6087N has been designed with ease of operation in mind. In fact it is an uncomplicated butterfly combination purpose built to lower operating costs in terms of power and fuel consumptions, with power requirements starting at only 150hp. Equipped with 2 x 3.18m mowing unit, both fitted with 8 triangular discs and nylon tines DMC6087N is geared for productive work days.

The Features that Matter

DMC6087N is packed with features that matter, giving it the professional characteristics needed when adjusting the machine for changing conditions. Widespreading is standard fitted and conditioner speed can be set at either 600 or 900rpm by simply turning the gearbox. To ensure optimal overlap between front and rear units, the mowing units can be mounted in two positions on the suspension arm.



Mowing with one rear unit only.

OOST



Parking, Safe and Sure-Footed


With the integrated parking device, storage of the DMC6087N is made easy and convenient, requiring a minimum of space during winter storage. The mower is firmly parked on strong and stable parking foot, bringing total height below 4.00m.

Vertical Transport Position

For transport the mower folds into a compact position well behind the tractor. The folding design ensures that the weight is distributed evenly, with the weight of the mower close to the tractor. Transport height is well below 4.00m.



Large suspension springs, optionally with hydraulic setting of ground pressure.

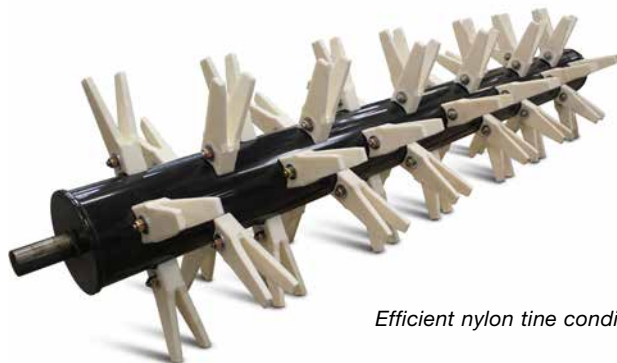

Efficient nylon tine conditioning.

SPECIFICATIONS

Kubota Models	DMC 6024N	DMC 6028N	DMC 6028R	DMC 6032N	DMC 6087N	DMC 6332T
Conditioner	Nylon	Nylon	Roller	Nylon	Nylon	SemiSwing
Dimensions & Weight						
Cutting Width (m)	2.40	2.80	2.80	3.20	8.75	3.18
Weight, approx (kg)	905	1025	1276	1090	2129	1400
Transport width (m)	1.90	2.10	2.10	2.30	3.00	3.00
Attachment to Tractor						
Hitch (CAT)	II	II	II	II	II	II
PTO (RPM)	540/1000	540/1000	540/1000	540/1000	1000	1000
Min. PTO horsepower req. (kW/hp)	50/70	60/80	60/80	65/90	110/150	66/90
Operation						
Number of discs	6	8	8	8	2x8	8
Number of knives	18	24	24	24	2x24	24
Stubble height (mm)	30-60	30-60	30-60	30-60	30-60	30-60
Cond. rotor speed	900/600	900/600	900	900/600	900/600	1000/700
Number of hydr. outlets	1D	1D	1D	1D	2D	2D
Tyres	-	-	-	-	-	-
Drawbar	-	-	-	-	-	-
Optional Equipment						
Wide spreading kit	•	•	•	•	•	o
Swath Belt	-	-	-	-	-	-
High skids (+20/+40/+60/+80mm)	o/o/o/o	o/o/o/o	o/o/o/o	o/o/o/o	o/o/o/o	o/o/o/o
Throwing wings for diff. crop	o	o	o	o	o	o
Lighting kit	o	o	o	o	o	o

• = Standard o = Optional - = Not available

Kubota Models	DMC 8028T	DMC 8032T	DMC 8032R	DMC 8036T	DMC 8036R	DMC 8532T
Conditioner	SemiSwing	SemiSwing	Roller	SemiSwing	Roller	SemiSwing
Dimensions & Weight						
Cutting Width (m)	2.80	3.20	3.20	3.50	3.50	3.20
Weight, approx (kg)	1820	1975	2061	2160	2247	2320
Transport width (m)	2.70	3.00	3.00	3.40	3.40	3.00
Attachment to Tractor						
Hitch (CAT)	II	II	II	II	II	II
PTO (RPM)	540/1000	540/1000	540/1000	540/1000	540/1000	540/1000
Min. PTO horsepower req. (kW/hp)	50/70	60/80	60/80	65/90	65/90	60/80
Operation						
Number of discs	8	8	8	10	10	8
Number of knives	24	24	24	30	30	24
Stubble height (mm)	30-60	30-60	30-60	30-60	30-60	30-60
Cond. rotor speed	900/600	900/600	900	900/600	900	900/600
Number of hydr. outlets	1S	1S+1D	1S+1D	1S + 1D	1S+1D	1S+1D
Tyres	380/55-17	380/55-17	380/55-17	380/55-17	380/55-17	380/55-17
Drawbar	Left Hand	Left hand	Left hand	Left hand	Left Hand	Centre
Optional Equipment						
Wide spreading kit	o	o	o	o	o	o
Swath Belt	o	o	o	o	o	o
High skids (+20/+40/+60/+80mm)	o/o/o/o	o/o/o/o	o/o/o/o	o/o/o/o	o/o/o/o	o/o/o/o
Throwing wings for diff. crop	o	o	•	o	•	o
Lighting kit	•	•	•	•	•	•

• = Standard o = Optional - = Not available

DMC 6332R	DMC 6336T	DMC 6336T VARIO	DMC 7028T	DMC 7032T	DMC 7032R	DMC 7036T	
Roller	SemiSwing	SemiSwing	SemiSwing	SemiSwing	Roller	SemiSwing	
3.18	3.50	3.50	2.80	3.20	3.20	3.50	
1460	1550	1495	1145	1230	1267	1290	
3.00	3.00	3.00	2.70	3.00	3.00	3.40	
II	II	II	II	II	II	II	
1000	1000	1000	540/1000	540/1000	540/1000	540/1000	
66/90	90/120	90/120	50/70	55/80	55/80	65/90	
8	10	10	8	8	8	10	
24	30	30	24	24	24	30	
30-60	30-60	30-60	30-60	30-60	30-60	30-60	
900	1000/700	1000/700	900/600	900/600	900	900/600	
2D	2D	2D	1S	1S	1S	1S	
-	-	-	-	-	-	-	
-	-	-	-	-	-	-	
o	o	•	-	-	-	-	
-	-	-	-	-	-	-	
o/o/o/o	o/o/o/o	o/o/o/o	o/o/o/o	o/o/o/o	o/o/o/o	o/o/o/o	
o	o	o	o	o	o	o	
o	o	o	o	o	o	o	

DMC 8532R	DMC 8536T	DMC 8536R				
Roller	SemiSwing	Roller				
3.20	3.50	3.50				
2426	2160	2515				
3.00	3.40	3.40				
II	II	II				
540/1000	540/1000	540/1000				
60/80	65/90	65/90				
8	10	10				
24	30	30				
30-60	30-60	30-60				
900	900/600	900				
1S+1D	1S+1D	1S+1D				
380/55-17	380/55-17	380/55-17				
Centre	Centre	Centre				
o	o	o				
o	o	o				
o/o/o/o	o/o/o/o	o/o/o/o				
•	o	•				
•	•	•				

The company reserves the right to change the above specifications without notice. This brochure is for descriptive purpose only. Some of the items pictured in this brochure are optional and not standard equipment. Please consult your local Kubota dealer for warranty, safety or product information. For your safety, Kubota strongly recommend the use of a seat belt in all applications.

©2017 Kverneland Group Kerteminde AS



KVERNELAND GROUP UK LTD.

Walkers Lane, Lea Green, St. Helens
Merseyside, WA9 4AF
Phone + 44 1744 8532 00

Visit our web site at: www.kubota.co.uk